



PEARL

Active and passive in-plane wall fluctuations in turbulent channel flows

Józsa, T. I.; Balaras, E.; Kashtalyan, M.; Borthwick, A. G.L.; Viola, I. M.

Published in:

Journal of Fluid Mechanics

DOI:

[10.1017/jfm.2019.145](https://doi.org/10.1017/jfm.2019.145)

Publication date:

2019

Document version:

Other version

Link:

[Link to publication in PEARL](#)

Citation for published version (APA):

Józsa, T. I., Balaras, E., Kashtalyan, M., Borthwick, A. G. L., & Viola, I. M. (2019). Active and passive in-plane wall fluctuations in turbulent channel flows. *Journal of Fluid Mechanics*, 866(0), 689-720. <https://doi.org/10.1017/jfm.2019.145>

All content in PEARL is protected by copyright law. Author manuscripts are made available in accordance with publisher policies. Wherever possible please cite the published version using the details provided on the item record or document. In the absence of an open licence (e.g. Creative Commons), permissions for further reuse of content should be sought from the publisher or author.

Supplementing materials

Active and passive in-plane wall fluctuations in turbulent channel flows

**T. I. Józsa^{1,2,†}, E. Balaras³, M. Kashtalyan⁴, A. G. L. Borthwick⁵,
and I. M. Viola²**

¹Department of Engineering Science, Institute of Biomedical Engineering,
University of Oxford, Oxford OX1 3PJ, UK

²School of Engineering, Institute for Energy Systems, University of Edinburgh,
Edinburgh EH9 3FB, UK

³Department of Mechanical and Aerospace Engineering, The George Washington University,
Washington DC 20052, USA

⁴School of Engineering, Centre for Micro- and Nanomechanics (CEMINACS),
University of Aberdeen, Aberdeen AB24 3UE, UK

⁵School of Engineering, Institute for Infrastructure and Environment, University of Edinburgh,
Edinburgh EH9 3FB, UK

(Received xx; revised xx; accepted xx)

$x_{2,c}^+$	Drag reduction (DR) [%]			
	$u'_{1,a}$ -control		$u'_{3,a}$ -control	
	$Re_\tau \approx 180$	$Re_\tau \approx 1000$	$Re_\tau \approx 180$	$Re_\tau \approx 1000$
1	3.48	4.02	4.78	4.38
2	4.19	—	8.95	—
3	5.23	—	12.20	—
5	6.51	6.65	17.18	—
7	7.84	—	—	—
8	7.97	7.03	—	19.30
9	7.73	—	23.06	—
10	6.87	—	23.85	—
11	—	—	24.15	—
12	—	3.57	24.29	18.16
13	—	—	23.90	—
15	0.63	—	21.91	13.22

Table 1: Drag reduction measured with active streamwise ($u'_{1,a}$) and spanwise ($u'_{3,a}$) controls.

#	Re_τ	A_m	A_d	A_s	DR [%]	Comment
1	≈ 180	4	0.0	0.0625	2.87	
2	≈ 180	4	0.0	0.125	2.25	
3	≈ 180	4	0.0	0.25	3.39	
4	≈ 180	4	0.0	0.50	3.11	
5	≈ 180	4	0.0	1.00	3.68	Lo0Lo, max drag reduction
6	≈ 180	4	0.0	2.00	3.41	
7	≈ 180	4	0.0	4.00	3.33	
8	≈ 180	4	0.0	8.00	2.56	
9	≈ 180	4	0.0	16.00	1.80	
10	≈ 180	4	0.0	32.00	1.28	
11	≈ 180	4	0.0	64.00	0.61	
12	≈ 180	4	0.0	96.59	0.86	Lo0Hi, optimised for max RC$\{\tau'_{1,rms}\}$
13	≈ 180	4	0.0	128.00	0.66	
14	≈ 180	4	0.0	256.00	0.16	
15	≈ 180	4	0.0	512.00	-0.07	
16	≈ 180	4	0.0	1024.00	-0.17	
17	≈ 180	16	0.0	1.00	2.87	
18	≈ 180	64	0.0	1.00	1.77	
19	≈ 180	256	0.0	1.00	0.36	
20	≈ 180	1024	0.0	1.00	0.06	
21	≈ 180	4	1.0	1.00	3.54	
22	≈ 180	4	4.0	1.00	3.19	
23	≈ 180	4	16.0	1.00	2.47	
24	≈ 180	4	64.0	1.00	1.78	
25	≈ 180	4	256.0	1.00	0.66	
26	≈ 180	8	1.0	1.00	3.32	
27	≈ 180	16	1.0	1.00	2.71	
28	≈ 180	32	1.0	1.00	2.21	
29	≈ 180	8	2.0	2.00	3.08	
30	≈ 180	8	4.0	2.00	2.89	
31	≈ 180	8	8.0	2.00	2.87	
32	≈ 180	8	16.0	2.00	2.52	
33	≈ 180	8	32.0	2.00	1.95	LoHiLo
34	≈ 180	8	4.0	0.25	2.66	
35	≈ 180	8	4.0	0.50	2.92	
36	≈ 180	8	4.0	1.00	3.18	
37	≈ 180	8	4.0	2.00	2.89	
38	≈ 180	8	4.0	4.00	2.64	
39	≈ 180	4	0.1	0.10	3.16	
40	≈ 180	4	1.0	0.50	3.61	LoLoLo, same as #44

#	Re_τ	Λ_m	Λ_d	Λ_s	DR [%]	Comment
41	≈ 180	4	1.0	2.00	3.47	
42	≈ 180	4	0.5	1.00	3.45	
43	≈ 180	4	2.0	1.00	3.23	
44	≈ 1000	28	7.0	3.50	1.47	LoHiLo, same as #40
45	≈ 1000	8	1.0	1.00	2.35	LoLoLo, max drag reduction
46	≈ 1000	8	0.0	0.10	-0.64	max drag increase
47	≈ 1000	8	0.0	1.00	2.04	
48	≈ 1000	8	0.0	10.00	1.62	
49	≈ 1000	8	0.0	100.00	2.29	
50	≈ 1000	8	0.0	1000.00	0.18	

Table 2: Drag reduction measured with passive streamwise wall fluctuations ($u'_{1,p}$).

#	Re_τ	Λ_m	Λ_d	Λ_s	DR [%]	Comment
51	≈ 180	4	1.0	1.00	-58.77	max drag increase
52	≈ 180	8	1.0	1.00	-55.12	
53	≈ 180	16	1.0	1.00	-49.00	LoLoLo
54	≈ 180	32	1.0	1.00	-40.52	
55	≈ 180	16	1.0	2.00	-48.52	
56	≈ 180	16	1.0	4.00	-47.88	
57	≈ 180	16	1.0	8.00	-46.76	
58	≈ 180	16	1.0	16.00	-43.63	
59	≈ 180	16	64.0	16.00	-17.65	
60	≈ 180	16	64.0	64.00	-13.37	
61	≈ 180	16	64.0	128.00	-10.26	
62	≈ 180	16	128.0	128.00	-7.18	
63	≈ 180	4	0.0	646.93	-3.67	Lo0Hi, optimised for max RC$\{\tau'_{3,rms}\}$
64	≈ 180	4	0.0	1024.00	-1.77	min drag increase

Table 3: Drag reduction measured with passive spanwise wall fluctuations ($u'_{3,p}$).

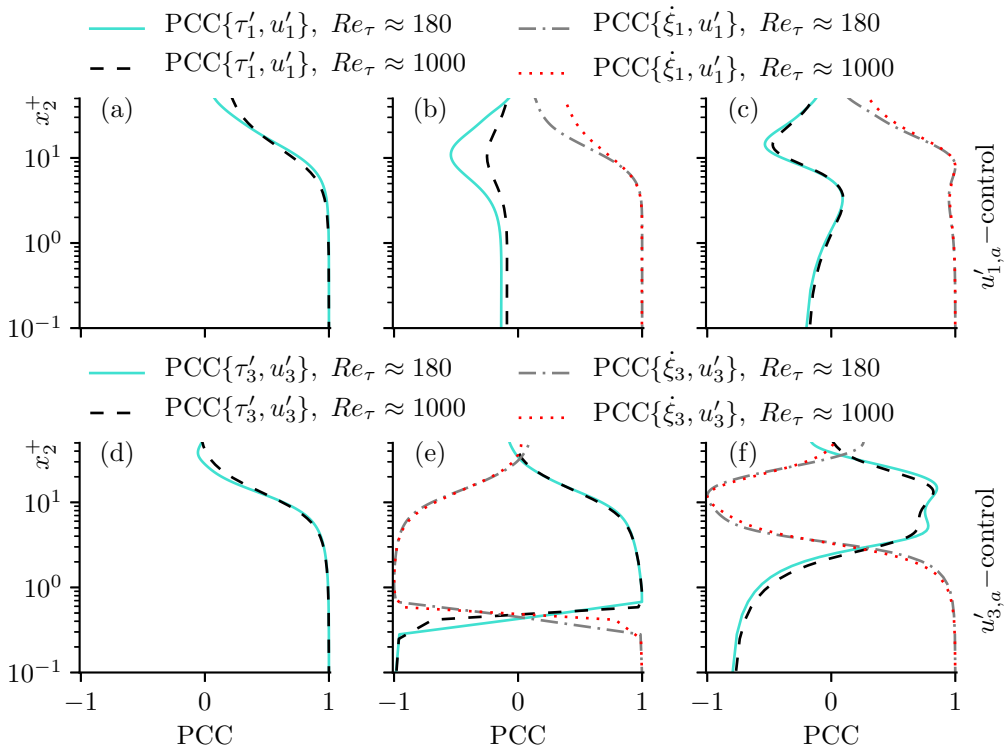


Figure 1: Pearson Correlation Coefficients of the wall shear stress fluctuations and the corresponding fluid velocities ($\text{PCC}\{\tau'_1, u'_1\}$ and $\text{PCC}\{\tau'_3, u'_3\}$), and the wall velocities and the corresponding fluid velocities ($\text{PCC}\{\xi'_1, u'_1\}$ and $\text{PCC}\{\xi'_3, u'_3\}$): baseline, streamwise direction (a); $u'_{1,a}$ -control with $x_{2,c}^+ = 1$ (b); $u'_{1,a}$ -control with $x_{2,c}^+ = 8$ (c); baseline, spanwise direction (d); $u'_{3,a}$ -control with $x_{2,c}^+ = 1$ (e); and $u'_{3,a}$ -control with $x_{2,c}^+ = 8$ (f).

The Pearson Correlation Coefficient (PCC) between two variables with zero mean value (q_1 and q_2) based on spatial averaging is

$$\text{PCC}\{q_1, q_2\} = \frac{\langle q_1 q_2 \rangle_s}{\sqrt{\langle q_1^2 \rangle_s \langle q_2^2 \rangle_s}}. \quad (0.1)$$