



PEARL

A cost-effectiveness analysis of water security and water quality: impacts of climate and land-use change on the River Thames system

Whitehead, P. G.; Crossman, J.; Balana, B. B.; Futter, M. N.; Comber, S.; Jin, L.; Skuras, D.; Wade, AJ; Bowes, M. J.; Read, D. S.

Published in:

Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences

DOI:

[10.1098/rsta.2012.0413](https://doi.org/10.1098/rsta.2012.0413)

Publication date:

2013

Link:

[Link to publication in PEARL](#)

Citation for published version (APA):

Whitehead, P. G., Crossman, J., Balana, B. B., Futter, M. N., Comber, S., Jin, L., Skuras, D., Wade, AJ., Bowes, M. J., & Read, D. S. (2013). A cost-effectiveness analysis of water security and water quality: impacts of climate and land-use change on the River Thames system. *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 371(2002), 20120413-20120413. <https://doi.org/10.1098/rsta.2012.0413>

All content in PEARL is protected by copyright law. Author manuscripts are made available in accordance with publisher policies. Wherever possible please cite the published version using the details provided on the item record or document. In the absence of an open licence (e.g. Creative Commons), permissions for further reuse of content should be sought from the publisher or author.

A Cost Effectiveness Analysis of Water security and Water Quality: Impacts of Climate and Land Use Change on the River Thames System

Journal:	<i>Philosophical Transactions A</i>
Manuscript ID:	RSTA-2012-0413.R1
Article Type:	Research
Date Submitted by the Author:	n/a
Complete List of Authors:	Whitehead, Paul; University of Oxford, Geography and the Environment crossman, jill; OXFORD, SOGE balana, Bedru; JH Institire, Environment futter, martyn; SLU, environment comber, sean; Plymouth Uni, environment jin, li; NEW YORK State uni, Geology skuras, demitris; Patras Uni, Economics Wade, Andrew; University of Reading, School of Human and Environmental Sciences Bowes, Mike; CEH, environment Read, Daniel; CEH, Environment
Issue Code: Click here to find the code for your issue.:	water
Subject:	Environmental engineering < ENGINEERING AND TECHNOLOGY
Keywords:	River Thames, Water quality, Climate Change, hydrology, cost effectiveness, land use change

SCHOLARONE™
Manuscripts

A Cost Effectiveness Analysis of Water security and Water Quality: Impacts of Climate and Land Use Change on the River Thames System

Whitehead P G^{1*}, Crossman J¹, Balana, B B², Futter M N³, Comber, S⁴, Jin L⁵, Skuras D⁶, Wade A.J.⁷, Bowes M.J.⁸ and Read D. S.⁸

¹School of Geography and the Environment, University of Oxford, South Parks Road, Oxford, OX1 3QY, United Kingdom

²The James Hutton Institute, Social Economic and Geographic Sciences, Craigiebuckler, Aberdeen AB15 8QH, Scotland UK

³Department of Aquatic Sciences and Assessment, Swedish University of Agricultural Sciences, SE-75007 Uppsala, Sweden

⁴Department of Environmental Science, Plymouth University, Drake Circus, Plymouth, PL4 8AA

⁵Department of Geology, State University of New York College at Cortland, Cortland, NY 13045, USA

⁶Department of Economics, University of Patras, Rio, Patras 26500, Greece

⁷School of Geography and Environmental Science, University of Reading, RG6 6AB. UK

⁸Centre For Ecology and Hydrology, Wallingford, UK, OX10 8BB

*Corresponding author contact information:

Phone number: +44 (0)7972805094

Email: paul.whitehead@ouce.ox.ac.uk

Abstract

The catchment of the River Thames, the principal river system in Southern England, provides the main water supply for London but is highly vulnerable to changes in climate, land use and population. The river is eutrophic with significant algal blooms with phosphorus assumed to be the primary chemical indicator of ecosystem health. In the Thames Basin phosphorus is available from point sources such as wastewater treatment plants (WWTPs) and from diffuse sources such as agriculture. In order to predict vulnerability to future change, the Integrated Catchments Model for Phosphorus (INCA-P) has been applied to the river basin and used to assess the cost effectiveness of a range of mitigation and adaptation strategies. It is shown that scenarios of future climate and land use change will exacerbate the water quality problems but a range of mitigation measures can improve the situation. A cost effectiveness study has been undertaken to compare the economic benefits of each mitigation measure and to assess the phosphorus reductions achieved. The most effective strategy is to reduce fertiliser use by 20% together with the treatment of effluent to a high standard. Such measures will reduce the instream phosphorus concentrations to close to the EU Water Framework Directive target for the Thames.

Keywords: Modelling, Climate Change, Water Quality, Phosphorus, Cost Effectiveness, Mitigation, Adaptation, INCA, Thames

INTRODUCTION

Water security is an issue facing every country as populations increase and changing climate and land use alter water availability and water demand (Grey et al, 2013). The need for the optimal use of water resources is vital but the problems of data uncertainty and system complexity make traditional optimization approaches impractical (Hall, 2013). Thus a satisficing approach is often used in the UK and the EU whereby a decision-making strategy is adopted that attempts to meet an acceptability threshold. One example of this is the EU Water Framework Directive (WFD, EU, 2000) where instream standards or thresholds are set to achieve a desirable ecological goal. The WFD implementation is reaching a critical point throughout Europe whereby catchment management plans have to be put in place (the first target being 2015, with 6 year cycles thereafter) in order to meet specific water quality and ecological thresholds for rivers, lakes, wetlands and groundwaters.

In the UK, a wide range of measures have been proposed and evaluated to achieve the required status (Newell-Price et al. 2011). Many of these measures, such as source control of pollutants, enhanced effluent treatment or changed agricultural practices, are expensive and require cooperation from a wide range of stakeholders. Phosphorus is considered to be the key parameter controlling ecology and hence eutrophic status in the UK and worldwide (UK TAG, 2008, Vollenweider, 1968), although Barker et al. (2008) have raised the issue of nitrogen being of concern, especially in terms of biodiversity. Bowes et al. (2012) has identified water residence time as a factor controlling algal growth, but there are many other factors such as flow, light intensity, suspended solids, nutrient concentrations that affect algal growth as well as shading by riparian vegetation (Hutchins et al., 2010)

Phosphorus (P) control has therefore been determined to be the main management strategy to be used to prevent the growth of nuisance algae in UK river systems. There are many diffuse sources of P in catchments including run off from land used for agriculture and other purposes. Then there are point sources from Wastewater Treatment Plants (WWTPs) and septic tanks which receive phosphorus inputs from principally domestic sources. These include detergents and phosphorus present in both natural foods and food supplemented by additives. In addition, P is dosed into drinking water to suppress lead concentrations in drinking water (Comber et al., 2009). Thus catchment management of P often involves agreement between riparian land owners, farmers, water companies, the chemical industry, the Environment Agency and DEFRA (Department of Environment, Food and Rural Affairs). Needless to say, with so many stakeholders, a complicated set of negotiations are required. The Environment Agency has a primary role as a water quality regulator, with pollution control functions and the licensing of consents for water abstraction and for effluent discharges from industry and Water Companies. DEFRA also has a major role in planning national controls on farming and the control of nutrients from farming activities and industry, as they affect international protocols and agreements. The banning of phosphorus (P) in domestic laundry cleaning products is a good example of this (DEFRA, 2008) to reduce P in WWTPs at source.

Integrated modelling tools can assist in the planning and catchment management process by providing an assessment of source apportionment, processes and dynamics so that strategic plans can be agreed between parties. Such integrated models need to represent the whole catchment mass balance and incorporate source and sinks and the physical, chemical and ecological processes so that a fair distribution of causal effects can be ascertained. Also, because of the varying costs of P mitigation measures and demand management options, assessment of the cost-effectiveness of different measures or combination of measures is required to reach economic decisions (Balana et al., 2011).

1
2 In addition to any mitigation measures, the longer term changes imposed on the catchment by
3 external factors, such as climate change and land use change must be considered. In the case of land
4 use change, it is predicted that world food prices will increase rapidly in future years as a response
5 to both global food scarcity and dwindling natural resources of phosphate fertiliser. Farmers are
6 likely to respond to these changing prices by altering the mix of crops grown and by also increasing
7 crop area. On the climate change issue, there is now a consensus amongst scientists and policy
8 makers that human induced climate change is occurring (IPCC, 2007) and that regardless of future
9 greenhouse gas emission reductions, substantial climate change is unavoidable. One of the most
10 significant effects of climate change will be on the UK hydrological cycle (Wilby et al., 1994).
11 Extremes in the hydrological system during the past decades have reflected the vulnerability of our
12 water resource systems to climatic fluctuations (Marsh, 2007; Marsh and Sanderson, 1997). UK
13 Climate Projections 2009 (UKCP09, Murphy et al., 2009) is the latest climate model output and is
14 the fifth generation of climate information for the UK. It provides climate change projections with
15 greater spatial and temporal detail and is the first dataset which gives probabilistic projections of
16 future climate change (Murphy et al., 2009). UKCP09 reports that by 2080s under the medium
17 emission scenario, all areas of the UK will become warmer relative to 1961-1990 baseline
18 conditions. Summer mean temperature in parts of Southern England could increase and
19 precipitation patterns are projected to change significantly into the future. Also potential
20 evaporation will change so that summer evaporation rates will increase, imposing a further stress on
21 summer river flows and hence water supply.
22
23
24

25 In this paper we address all of the above issues with respect to water quality, catchment processes
26 and cost effectiveness to identify the best strategy for catchment management. The analysis also
27 takes into account changes in climate, land use, and water resources under a range of mitigation or
28 adaptation strategies. The River Thames is utilized as a case study as this is a critical river flowing
29 through Southern England, and supplying about two thirds of London's water from the main
30 abstraction points in the lower Thames. The demands for water in London are likely to increase
31 with a projected population rise of 14% in the region by 2020 according to the UK Office of
32 National Statistics. Moreover, the Thames has been identified as a vulnerable river system by the
33 World Wildlife Fund (WWF, 2008) and thus it is a very suitable catchment for study from the
34 perspectives of water scarcity, water quality and cost effectiveness.
35
36

37 The Integrated Catchment Model INCA has been applied to the whole Thames System to assess a
38 range of scenarios and mitigation measures (Crossman et al., 2013) and the likely future impacts on
39 water quality in the river system. Based on the outcomes of this scenario and mitigation analysis, a
40 cost effectiveness analysis has been undertaken to assess the relative performance of different
41 mitigation/adaptation options and determine the best strategy for water quality management.
42
43

44 **THE RIVER THAMES SYSTEM**

45 The Thames River is a key river in southeast England and has a catchment area of 10,000 km²
46 (Figure 1) and a length of 218 km from the source in the Cotswold Hills of Gloucestershire to the
47 Teddington in West London. The bedrock in the region is mainly of permeable chalk which gives a
48 base flow index of approximately 0.65, although there are sub-catchments of low permeability
49 clays. The water quality is characterized by high base cation concentrations due to the chalk
50 aquifers and groundwater flows. The mean annual flow (1999-2008) ranges from 1.5 m³/s at
51 Cricklade, to 33.5 m³/s at Days Weir in the centre of the catchment, and to 65.5 m³/s at downstream
52 Teddington (Figure 1). Seasonally, the high flows normally occur in the winter and early spring
53 (January to April) and low flows occur in the summer and late autumn (July-November). Average
54 rainfall for the catchment is low at 711 mm/year and the catchment is predominantly rural in the
55 upper reaches and becomes more urban further downstream. The low average annual rainfall
56 explains the vulnerability of the Thames to drought and hence climate change. The Thames is a
57 crucial water source for London with the population of Greater London of approximately 14
58
59
60

1 million. In addition there have been large changes in land use in the Thames catchment since the
 2 1930s (Whitehead et al., 2002) and this has also affected flows, water quality and ecology
 3 (Whitehead et al., 2009).
 4

5
 6 The potential future impacts of climate change are being taken very seriously by the water company
 7 responsible for London's water supply, namely Thames Water Utilities Limited, as they are
 8 predicting a shortfall in water resources by the 2030s (Thames Water, 2011). This follows from
 9 serious droughts in recent decades (Marsh, 2007) and a major water resource problem in 1976 when
 10 London Reservoirs dried up and London was within days of running out of water (Whitehead,
 11 1990). Thames Water has been trying to convince the UK Government, the Environment Agency
 12 and the general public that a new reservoir is required to meet the predicted future shortfall. The
 13 cost of this will be high at approximately £1000 million for the full size reservoir proposed, and
 14 these costs would eventually fall on the water users. Thus water scarcity is a major issue for the
 15 South East of England and for London and this issue will be exacerbated in the future as climate
 16 change reduces summer flows (Jin et al., 2012).
 17
 18

19
 20 The water quality of the Thames has always suffered from high phosphorus loading derived from
 21 both point sources, from WWTPs along the river, and diffuse sources from agriculture. Exceedence
 22 of the P concentration standard is the largest single reason for UK water bodies not reaching good
 23 ecological status (GES) under the WFD. Achieving GES requires water bodies to exhibit
 24 characteristics close to reference, pristine conditions or to move towards that condition. Diatom
 25 numbers and types have been used to generate a P standard by which river quality may be judged to
 26 be in high, good, moderate or poor condition (UKTAG, 2008). The WFD is being applied to the
 27 Thames and, as shown in Table 1, for a high alkalinity river such as the Thames, of any altitude, a
 28 soluble reactive phosphorus (SRP) standard for good status is estimated to be 0.12 mg/l. Current
 29 SRP in the river is in the order of 0.18 mg/l, some 50% above the required standard. Thus the
 30 challenge for any mitigation measure or set of measures is to get below this standard.
 31
 32

33
 34 Table 1 WDF Phosphorus standards for the UK Rivers

35
 36

Water type	SRP (mg/l) mean standards for High to Poor WFD Chemical Status			
	High	Good	Moderate	Poor
Under 80m altitude and less than 50 mg/l alkalinity	0.03	0.05	0.15	0.5
Over 80m altitude and less than 50 mg/l alkalinity	0.02	0.04	0.15	0.5
Any altitude and more than 50 mg/l alkalinity	0.05	0.12	0.25	1

37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60

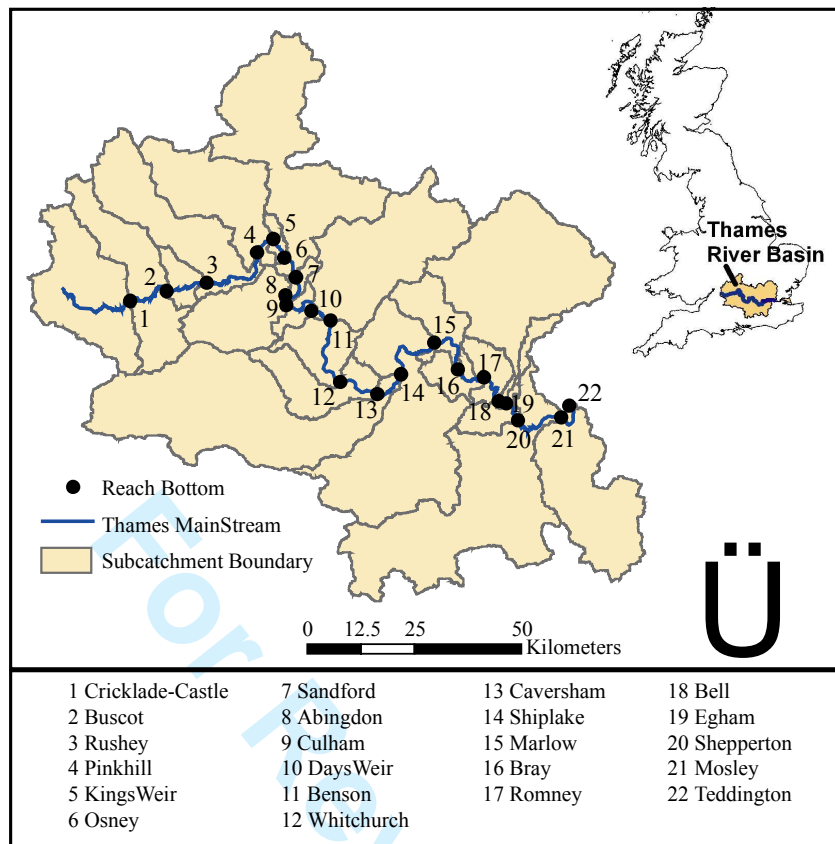


Figure 1 Map of the River Thames showing Reach Boundary Locations (after Jin et al. , 2012)

INCA-P MODELLING OF THE THAMES

A comprehensive process based dynamic model INCA (Whitehead et al., 1998 a and b, Wade et al., 2002 a and b) has been set up for the whole of the Thames Catchment so that we can investigate changes in land use and climate on flow, water quality and ecology. Jin et al. (2012) applied the nitrogen version of INCA to the whole Thames system and evaluated the effects of climate change on flow and water quality. The impacts of climate change on flow and water quality have also been assessed for the River Kennet, a tributary of the Thames, by Wilby et al. (2006) and Whitehead et al. (2006). In all these studies, the general conclusion is that late summer flows will be reduced significantly, due to reduced rainfall and increased temperatures driving up evaporation. Studies on these and other UK rivers by Whitehead et al. (2009) have shown that the changes in flow regime and temperature have significant effects on nitrogen, phosphorus and ecology, with changes in dilution and reaction kinetics affecting water quality on a seasonal basis, with consequent effects on stream ecology.

The INCA-P version of the model has been applied recently to the Thames by Crossman et al. (2013). and a wide range of scenarios and mitigation strategies have been evaluated. INCA-P is a physical, process-based model, as shown in Figure 2, which simulates flow, sediment, phosphorus (TP, PP and SRP) in soils, groundwaters and streams (Wade et al., 2002b, Wade et al., 2009, Whitehead et al., 2011, Crossman et al. 2012, 2013). It has both a land component and a river component, allowing it to track P inputs which flow into the river from the land surface throughout the catchment. INCA-P is a distributed model and takes account of spatial variations in land use, vegetation and hydrology by dividing the catchment into sub-catchments (Wade et al., 2002b, 2009) or into a multibranch network of tributaries and streams that flow into a main river system (Whitehead et al., 2011, Crossman et al. 2012, 2013). Hydrology in each reach is characterized by specifying the a and b parameters of the velocity–flow relationship,

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

$V = aQ^b$, which is used to calculate residence times within each reach. The model then sequentially integrates P inputs to each reach and can also consider point effluents such as sewage discharges. The model is dynamic and calculates variations in flow, P fluxes and P concentrations on a daily basis. The model includes all key biochemical processes taking place in the soil zone (Wade et al., 2002b, 2009). Process rate estimates and other parameters may be measured, derived from the literature, or fitted during model calibration. Fluxes and concentrations of P are simulated by solving mass balance equations for terrestrial processes whilst simultaneously solving flow equations which determine the amount of runoff and leaching into the channel and the dilution potential of the river (Wade et al., 2002b). INCA requires daily time series of soil moisture deficit (SMD), hydrologically effective rainfall (HER), air temperature and precipitation as well as spatial data describing the major land use types, estimates of growing season for different crops and vegetations types, fertiliser application quantities (DEFRA, 2012) and timings and locations of point sources and effluent concentrations as inputs. INCA then provides daily time series of flow, TP and SRP at each reach boundary, as well as profiles along with descriptive statistics of these variables at selected sites.

In order to model the Thames, Jin et al. (2012) and Crossman et al. (2013) divided the river system into 22 reaches and sub-catchments from the source at Cricklade to the lowest weir on the freshwater downstream boundary at Teddington (Figure 1). Reach boundaries were selected at confluences, gauging stations and water quality monitoring stations. The sub-catchment boundaries were derived using a Digital Terrain Model (DTM). The daily time series of hydrological effective rainfall (HER), soil moisture deficit (SMD) have been derived using a combination of Meteorological Office Rainfall and Temperature data and the HBV model (Crossman et al., 2013, Saelthun 1996). The effects of land surface and topography on flow are simulated through a semi-distributed approach incorporating the dynamics and characteristics of each sub-catchment. The residence times and flow rates in the soil and groundwater zones in the model are also essential to the simulation of flows through these zones.

Crossman used the extensive data set for hydrology, water quality, land use and P inputs to model the system selecting the 2001-2004 dataset for calibration and the 2005 – 2008 dataset for validation. INCA modelling applications to the catchment were highly successful, with excellent correspondence achieved with observed data for flow and SRP simulations, giving average R^2 values of 0.9 and 0.6 respectively. Validation coefficients were marginally lower than for calibration, with R^2 values of 0.8 and 0.5 respectively. The model has been the subject of extensive sensitivity and uncertainty analysis (Wade et al, 2001; Wade et al, 2002b) and in general, there are a series of key parameters which control the behaviour of models. In the Thames three most sensitive parameters are hydrological, with groundwater residence time being the most important, followed by base flow index, and river water velocity. The Thames has a high groundwater flow component and as such residence times, flow pathways and velocities affect dilution and reaction kinetics of both diffuse and direct inputs. The detailed application of INCA-P of the Thames is described by Crossman et al. (2013) and in this paper we utilize the simulation results to assess cost effectiveness of a range of P control or mitigation measures.

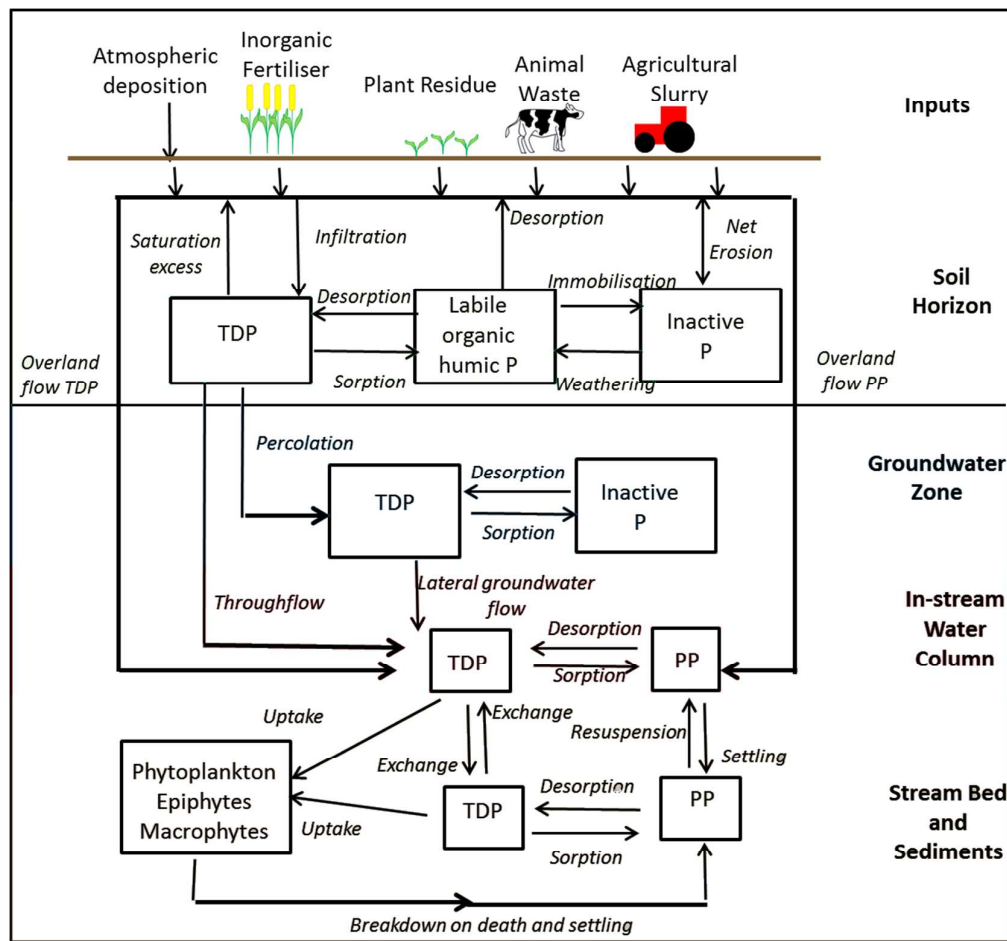


Figure 3 The INCA-P Model nutrient flows and process controls (after Crossman et al, 2013)

THAMES CATCHMENT SCENARIOS AND MITIGATION RESULTS

As part of the EU REFRESH project (see www.refresh.ucl.ac.uk), a set of scenarios have been evaluated for the Thames to assess climate change, land use change and water resource issues. In addition, a set of mitigation or adaptation measures have been evaluated, with the results being described in detail by Crossman et al. (2013). Here we are concerned with the cost effectiveness of the measures and their ability to reduce SRP in the river to meet the WFD standard.

A partial factorial computer experiment (Sacks et al. 1989) was performed to analyse the potential response of in-stream SRP concentrations to a series of climate, land use and water management scenarios.

The 7 scenarios considered in the cost effectiveness analysis are:-

1. Baseline (i.e. current) conditions
2. Future climate for the period 2030-2060
3. Future climate plus a future land use (LU1) under a Global Food Security scenario such that arable land is increased from the current 35.5% to 50%. The land use change scenarios are based on the LandSFACTS model (Castellazi et al., 2010, Crossman et al., 2013)

4. Future climate and a more extreme projection of future land use (LU2) which assumes a Global Food Security scenario such that arable land is increased from the current 35.5% to 60% (Crossman et al., 2013)
5. Thames Water Resource Strategy with the construction of a new reservoir at Abingdon under Future Climate for the period 2030-2060
6. Thames Water Resource Strategy with the construction of a new reservoir under future climate plus the future land use (LU1)
7. Thames Water Resource Strategy with the construction of a new reservoir under future climate plus the future land use (LU2)

For climate change the KNMI atmospheric regional climate model (RACMO) has been used with the model being driven by the general circulation model (GCM) to project future climate variables (Hewitt and Griggs 2004). The land use change scenarios are based on the LandFACTS model (Castellazzi et al., 2010) and The water resources model assumes that Thames Water construct a new reservoir at Abingdon (Reach 8 on Figure 1) with winter water abstractions from the river into the new reservoir and subsequent water releases during summer months to enhance the water supply to London.

Options available to regulators and operators for phosphorus measures are essentially three fold:

- 1) Reduce loss from agricultural land runoff via a number of measures including:
 - a. reduced application rate
 - b. use of buffer zones or riparian wetlands
 - c. better manure management
 - d. control of loss of soil and runoff from land through stock management and farm infrastructure
- 2) Tertiary treatment at WWTP typically via:
 - a. the currently considered 'Best Available Technique' of iron dosing to reduce effluent P levels to a minimum level of 1 mg/l as total phosphorus; this is required already under a number of EU Directives including the Urban Wastewater Treatment Directive, WFD and Birds and Habitats Directive
 - b. apply enhanced technology to reduce phosphorus levels to less than 1 mg/l. This is possible via a combination of optimized dosing and ultra-filtration and is practiced in the USA, but owing to cost is not currently used in the UK (EA, 2012), although it is being evaluated by Wessex Water.
- 3) Source control of P entering WWTP via sources other than natural diet:
 - a. domestic laundry cleaning products – already to be banned by 2015
 - b. automatic dishwashing detergents
 - c. tap water dosing for controlling lead concentrations in drinking water
 - d. use of phosphorus in food additives

It should be emphasized that the UK Water Companies have a 5 year cycle of planning which is agreed with the UK Water regulator OFWAT. As part of this planning cycle, which results in 5 year water company Asset Management Plans (AMP), water resources strategies such as the Thames Reservoir are discussed, as well as phosphorus reduction strategies at WWTPs. In this paper we consider 2 levels of treatment, namely PR-1 with effluent discharge concentrations down to 1mg/l and PR-2 with effluent concentrations at 0.3 mg/l. Thus, taking account of these phosphorus inputs to the aquatic environment, the 5 mitigation measures considered for the Thames Catchment are:-

- 1) Reducing P fertiliser application by 20%;

- 2) P removal at WWTPs to meet a discharge concentration of P of 1mg/l total P, referred to here as the PR-1 strategy;
- 3) P removal at WWTPs to meet a discharge concentration of P of 0.3mg/l total P, referred to here as the PR-2 strategy;
- 4) A combined mitigation strategy of reducing fertilisers by 20% plus the PR-2 removal strategy;
- 5) Introducing riparian wetlands along the river system.

Table 2 shows the mean instream SRP concentrations simulated in the lower Thames under these scenarios and mitigation measures. The model results show that the future scenarios indicate a marginal effect of climate change on annual average SRP concentrations. However, future land use change under a global food security scenario has a large impact as the enhanced area of intensive agriculture increases the use of P fertilisers, a proportion of which will be lost to the river system. Even under the water resource strategy the SRP stays high, despite the release of water to augment flows in the summer months. The riparian wetlands seem to have minimal effect on the phosphorus concentrations. Thus the target of meeting the WFD phosphorus concentration of 0.12mg/l is going to be very difficult, if not impossible, without some significant mitigation measures. As illustrated in Figure 3, the fertiliser reduction and the PR-1 and PR-2 mitigation measures are most effective at reducing the SRP concentrations. The most effective combined strategy is to reduce fertilisers together with the PR-2 strategy. This generates a 50% reduction in SRP (Figure 3) and provides the best means of getting to the 0.12 mg/l SRP in-stream standard. The riparian wetlands do not seem to give a large decrease in SRP. This is unlike nitrogen where such a strategy would enhance the natural denitrification processes (Whitehead et al., 2006). With phosphorus there does not seem to be such a beneficial effect and Prior and Johnes (2002) have demonstrated this experimentally for wetlands on the River Lambourn, a tributary of the Thames, showing the flushing of P from the wetland during storm events. However, Hutchins et al. (2010) report that riparian vegetation overhanging water bodies can produce significant ecological advantages.

Table 2 Effects of the 7 Scenarios and 5 mitigation measures on mean SRP (mg/l) in the Lower Thames (Summary results from Crossman et al., 2013)

SCENARIOS	Baseline	20% Fertiliser Reduction	PR-1	PR-2	PR-2 + 20% Fertiliser Reduction	Riparian Wetlands
Present	0.187	0.149	0.154	0.145	0.097	0.186
Future CC	0.186	0.148	0.151	0.142	0.094	0.185
Landuse 1	0.232	0.178	0.198	0.189	0.122	0.231
Landuse 2	0.263	0.198	0.229	0.220	0.141	0.263
Water Resource future CC	0.185	0.146	0.156	0.147	0.099	0.185
Water Resource Landuse 1	0.229	0.171	0.203	0.195	0.123	0.229
Water Resource Landuse 2	0.261	0.187	0.235	0.227	0.139	0.261

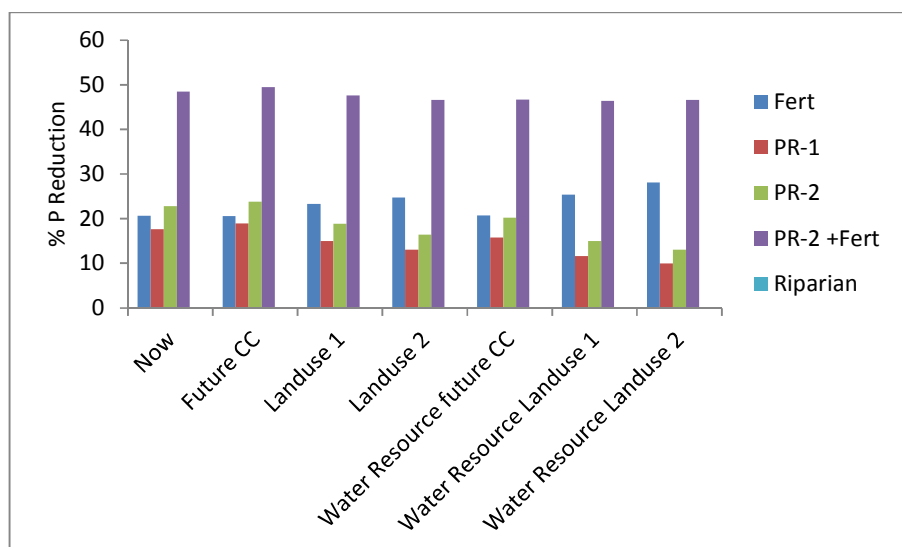


Figure 3 Percentage Reduction in baseline SRP in the Lower Thames under a range of Scenarios and Mitigation Measures (Summary results from Crossman et al., 2013)

COST EFFECTIVENESS ASSESSMENT

The WFD requires Member States to set water quality standards and identify cost-effective mitigation measures to achieve good ecological status (GES). Annex III of the WFD (EU, 2000) stipulates that a cost-effectiveness analysis (CEA) of water pollution mitigation measures be conducted as a pre-requisite in formulating programme of measures in order to achieve the objectives set out in the WFD at the least economic cost. The cost effectiveness of measures can be determined for a catchment by estimating the costs and effects of a range of measures to reduce phosphorus concentrations. Cost-effectiveness of a measure can then be obtained by computing the cost per unit reduction in the load discharged, concentration within a water body or cost per the percentage reduction in concentration. Cuttle et al. (2007) and Fezzi et al. (2008, 2010) report costs of agricultural measures based on a detailed economic analysis of farm statistics. However, the effectiveness of such measures is assessed in terms of P load reductions to the land surface from the farm. This is not really that useful from a river perspective as what is required is the impact on river water quality with respect to the standards expected to be achieved. Hutchins et al. (2009) address this issue by using a catchment-scale model to assess the impacts of N controls on instream nitrogen. Likewise, in this analysis we make use of the INCA-P model to assess the impacts on instream P.

Depending on the nature of the environmental problem, the specific mitigation/adaptation measures identified, and the scale of analysis, various estimation techniques or data sources can be utilized to obtain cost information. Direct private costs accruing from policy implementation have a local character and refer to specific economic sectors. This category comprises financial costs associated primarily with changes in farm economic returns. These costs are relatively easy to identify and quantify. Hence, they usually represent the main focus in cost-effectiveness analysis. However, besides private costs, the compliance process entails a wide range of costs such as administrative costs incurred by the regulating authorities (e.g., costs of monitoring and enforcing compliance) and other social costs. These indirect wider economic impacts are generally less tangible than the direct effects making their estimation a more difficult task. Here, we argue that cost estimates need to be based on the principle of 'opportunity cost' which actually incorporates both the direct private costs and indirect social costs of the activity. However, the decision on which costs to include in a CEA

1 depends on the availability of data for different cost components. Other important issues to address
2 when measuring or estimating costs are how to normalize for different time periods and quantifying
3 uncertainties.
4

5
6 For the purpose of this paper our cost estimates were mainly based on those that occur at the sectors
7 or agents directly affected by the mitigation or adaptation measures and public investment costs on
8 environmental and water infrastructure. Accordingly, costs for agricultural measures represent the
9 whole farm costs for fertiliser reduction. These estimates were collated from existing literature
10 sources (DEFRA, 2003; Fezzi et al., 2008, 2010; Cuttle et al., 2007) and scaled up to the whole
11 Thames catchment. Cuttle et al. (2007) report that a 20% reduction in phosphorus fertiliser has a
12 whole farm cost (i.e. including loss of yield) of £2.3 per hectare per year. Thus the costs of the
13 fertiliser reduction for the whole Thames can be calculated based on the area of intensive
14 agricultural land in the Thames river basin under the different scenarios. This area under baseline
15 conditions is available from DEFRA farm statistics, and has been estimated for the future land use
16 change scenarios LU1 and LU2 (Castellazi et al., 2010, Crossman et al., 2013). The costs for the
17 whole Thames river basin calculated for the baseline land use would be £16.38 million per year and,
18 for the LU1 and LU2 scenarios, £23.0 and £37.49 million per year respectively. Note the costs
19 increase in future years as the land use changes and the area of intensive farming increases. The
20 costs of the riparian areas are quoted by Cuttle et al. (2007) as £15.8 per hectare per year. The area
21 of riparian zones are calculated as 15m strips either side of the main river giving a total area of 653
22 hectares and a total cost of £0.01 million per year. The costs of the WWTPs P removal have been
23 calculated from Water Industry cost estimates of £19 per person per year to meet the 1mg/l standard
24 and £32 per person per year to meet 0.3 mg/l standard (EA, 2012). Given a population of 717,000
25 people being served by the main WWTPs on the river, then this generates an annual cost of £13.6
26 million per year for the 1mg/l standard and £22.9 million per year for the higher standard. The
27 reservoir costs are estimated as £750 million based on the Thames Water Resources Plans,
28 assuming a smaller reservoir is built to gain government, Ofwat and public approval. Assuming an
29 interest rate of 3% and a 20 year loan repayment time, the annual cost of the reservoir will be £50.4
30 million per year.
31
32
33
34

35 The costs of all the mitigation measures under the full range of scenarios are shown in Table 3.
36 Note the costs increase into the future as land use changes generating larger areas of intensive
37 agriculture and the reservoir is constructed. Also, the costs increase to cover the combined strategy
38 of PR-2 plus the 20% fertiliser reductions.
39

40 Cost effectiveness has then been calculated by dividing the costs in Table 3 by the percentage
41 reductions in SRP from the baseline, calculated using the data in Table 2. In general, the lower the
42 cost effectiveness, the better the value of that particular mitigation measure, as shown in Table 4.
43 The results shown in Table 4 indicate that riparian buffer zones are the most cost effective strategy
44 but this alone does not generate the kind necessary P reductions in the Thames, as indicated in
45 Table 2. The combined strategy of fertiliser reduction and PR-2 is the next most cost effective
46 strategy and should meet the WFD P target of 0.12mg/l. Table 4 shows the increasing trends in cost
47 through the scenarios and into the future due to the deleterious effects of firstly climate change, then
48 land use change and the projected cost of the reservoir. Reservoir development increases costs
49 significantly, but this high cost is justified by Thames Water Utilities Limited from a water scarcity
50 point of view, rather than any water quality advantage. Note the reservoir effect masks the riparian
51 effect in terms of concentration reduction (Table 2), so the cost effectiveness calculation generates
52 unrealistic high numbers and is therefore not shown on Table 4. The next most cost effective
53 measures are the PR-1 and PR-2 phosphorus removal strategies at the WWTPs. However, as
54 mentioned above, the combined strategy of both reducing fertilisers and implementing PR-2 has by
55 far the biggest impact on SRP concentrations. Only this combined mitigation strategy could actually
56 meet the WFD compliance target of 0.12mg/l. They are also the most reasonable in terms of cost
57
58
59
60

effectiveness and thus would be the best combined strategy for the Thames Catchment. However, the costs are significant, as a 50% reduction in SRP from the current concentration of 0.18 mg/l (Table 2) is required to meet the WFD standard of 0.12mg/l so the annual costs under each scenario are shown in Table 5 and indicates a significant annual cost to meet the WFD directive. Note this analysis excludes any source reduction measures, such as P sources from dishwashers but this is not a realistic P control at the moment as no acceptable alternative is available. Also P reduction in drinking water due to a switch away from lead piping is certainly possible but this would require a considerable investment.

Table 3 Cost of Mitigation Measures in £millions/year for the Thames for all Scenarios

SCENARIOS	Cost of Mitigation Strategies £millions/year				
	20% Fertiliser Reduction	PR-1	PR-2	PR-2 + 20% Fertiliser Reduction	Riparian
Present	16.4	13.6	22.9	39.3	0.01
Future CC	16.4	13.6	22.9	39.3	0.01
Landuse 1	23.0	13.6	22.9	45.9	0.01
Landuse 2	37.5	13.6	22.9	60.4	0.01
Reservoir plus Future CC	66.8	64.0	73.3	89.7	50.4
Reservoir plus Future CC plus Landuse 1	73.4	64.0	97.0	96.3	50.4
Reservoir plus Future CC plus Landuse 2	87.9	64.0	97.0	111	50.4

Table 4 Cost Effectiveness for the Mitigation Strategies for Whole Thames Catchment in millions £ per year per percentage SRP reduction

SCENARIOS	Cost Effectiveness-£millions per year per % SRP reduction				
	20% Fertiliser Reduction	PR-1	PR-2	PR-2 + 20% Fertiliser Reduction	Riparian
Present	0.79	0.77	1.01	0.81	0.06
Future CC	0.80	0.72	0.96	0.79	0.09
Landuse 1	0.99	0.91	1.21	0.96	0.11
Landuse 2	1.52	1.04	1.39	1.30	0.13
Reservoir plus Future CC	3.23	4.06	3.63	1.92	n/a

Reservoir plus Future CC plus Landuse 1	2.90	5.50	6.45	2.07	n/a
Reservoir plus Future CC plus Landuse 2	3.12	6.42	7.42	2.38	n/a

Table 5 The Total Costs of Meeting the WFD P target for the Thames River System

Scenario	Total Annual Cost £million/year
Now	40.6
Future CC	39.7
Landuse 1	48.2
Landuse 2	64.8
Water Resource future CC	96.1
Water Resource Landuse 1	103.7
Water Resource Landuse 2	118.9

DISCUSSION

In this study on the Thames, a wide range of scenarios and mitigation measures have been evaluated and the results assessed in terms of cost effectiveness. Crossman et al. (2013) have addressed the environmental impacts in detail and emphasized the deteriorating situation into the future with both climate change and land use change affecting water quality. The reaction of farmers to rising cereal prices driven by Global Food Security issues will almost certainly shift land use to more intensive agriculture, with increased fertiliser use. Thus the mitigation measures are important to counter these trends. The cost effectiveness analysis shows that fertiliser reductions are the most effective method to control instream SRP concentrations but significant WWTP P reductions are required to supplement this to meet WFD compliance target for P of 0.12mg/l.

One interesting potential new development in the Thames Catchment is the construction of a new reservoir at Abingdon. This will provide extra capacity to sustain flow in low flow summers. It is important to consider the operation of the reservoir to minimize the impact of climate change induced low flows and provide the sufficient water supply downstream to London. The plans for the reservoir operation are to fill it in winter months (e.g. December to April) and then release water at approximately a rate of 10 m³/s during the summer low flow period (e.g. June to September). This water would then be abstracted from the lower Thames for filling the London reservoirs. Such a scheme will have several consequences, although the extra flows will be of considerable benefit to London's water supply and decrease the vulnerability of London to drought, there could be unintended impacts. For example, in summer months the nutrient rich reservoir will be ideal for phytoplankton growth (Elliott et al., 2006) and these could seed the river system as the warmer reservoir water is released back into the river. Blooms of cyanobacteria and their associated cytotoxins are already becoming a potential problem in the Thames, as shown in Figure 4. These new cyanobacteria data were collected using a Beckman-Coulter Gallios Flow Cytometer (Bowes et al., 2012). Whilst the current levels of cyanobacteria in the Thames are not high at present, there is a major peak in the summer, and with reduced summer flows in the future, with longer residence times and increased temperatures there could well be future problems in the Thames, thereby imposing a further water security issue. Future research is needed to obtain an accurate assessment of the impacts of the reservoir, changing flows and temperatures on downstream ecology.

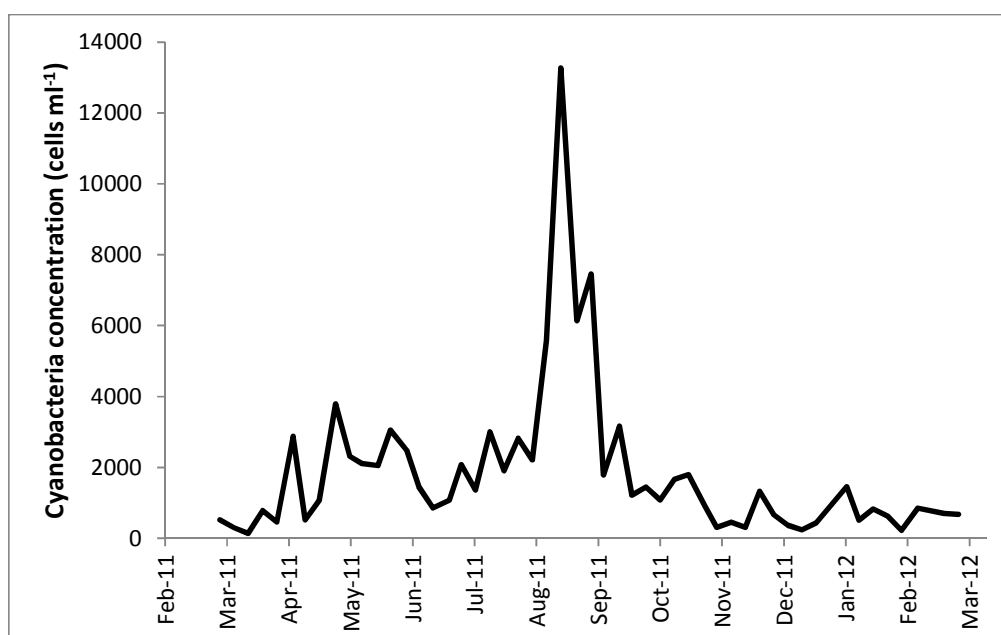


Figure 4 Cyanobacteria Concentrations in 2011/12 in the Lower Thames at Egham (Reach 19)

CONCLUSIONS

The methodology adopted in this paper draws on the complex set of interactions linking social systems of water supply and management and the ecological system of the Thames, and addresses the specific issue of the EU WFD. The implementation of this directive has been accepted by the UK government but has strong social impacts, as it will inevitably raise water costs to the general public and raises the question of how best to spend limited resources. The approach also addresses conservation needs so as to improve river ecology with consequent wildlife and societal benefits. At the heart of this paper is the question of water security, as climate change and land use change together with increasing water demand will put great strain on water resources in the Thames Region. The constraints of water quality are an added dimension to this, with the WFD drive to secure water quality improvements over time, which would hopefully lead to ecological benefits. Thus water quality is an essential aspect of water security. Sustainable management of water quality requires a long term perspective, with careful management of trade-offs between cost, water quality and other objectives for water security in river basins.

The application of INCA to the whole River Thames to address a range of scenarios and mitigation measures is a sophisticated but highly practical methodology for addressing future management options. It has been shown that the combined strategy of treatment for P removal at WWTPs combined with the fertiliser reductions is the best and least cost approach to manage P in the River Thames. It is highly likely that this strategy will apply to other similar UK lowland catchments. Moreover, it is almost certainly applicable to other catchments across the EU and potentially to other catchments worldwide.

It is striking that global food security could have a large effect on land use and hence fertiliser use, which would be highly detrimental to water quality and hence water security. Most catchments in developing countries face the same tipping point that the Thames reached several years ago, when P concentrations ceased to become limiting to the growth of nuisance algae. As nearly all these catchments are being subjected to industrial and domestic effluent discharges as well as runoff from agricultural development, it is almost inevitable that a similar strategy will be required. Planning for these controls up front would make a lot of sense to avoid the threat to water supply from unregulated pollution.

1
2
3 The modelling in the paper has demonstrated a powerful linkage between societal decisions and
4 ecology, allowing satisfying solutions to problems to be evaluated in a quantitative manner. Such
5 quantitative assessments are required by governments, water companies and environment agencies
6 to justify expenditure on costly water demand and mitigation strategies. This will especially
7 important in the uncertain world of future climate change and global food and water security.
8 Integrated modelling is even more valuable when there are questions of water governance (Gober,
9 2013) and where multiple stakeholders need to negotiate an agreed water security solution. These
10 can be national issues that need resolving at the national level or at the multinational level where
11 transboundary issues arise (Garrick et al, 2013). The modelling approach allows an independent and
12 unbiased view of system behaviour and the scenario and mitigation analysis can help build trust
13 between negotiating parties so that water security strategies can be evaluated, discussed and agreed.
14
15

16 17 **ACKNOWLEDGEMENTS**

18 We like to thank Environment Agency for providing flow and water quality data for model
19 calibration and we would like to acknowledge the support of the European Union under the
20 REFRESH project grant 244121.
21
22

23 **REFERENCES**

- 24 Balana, B.B., Vinten, A., Slee, B., 2011. A review on cost-effectiveness analysis of agri-
25 environmental measures related to the EU WFD: Key issues, methods, and applications.
26 *Ecological Economics*, 70: 1021-1031.
- 27 Barker, T, Hatton, K., O'Connor, M., Connor L. and Moss B. 2008, Effects of nitrate load on
28 submerged plant biomass and species richness: results of a mesocosm experiment.
29 *Fundamental and Applied Limnology*, Vol. 173, Number 2, pp 89-100
- 30 Bowes, M J, Gozzard, E., Johnson, A.C., Scarlett, P.M., Roberts, C., Read, D.S., Armstrong, L.K.,
31 Harman, S.A. and Wickham H.D. 2012 Spatial and temporal changes in chlorophyll-a
32 concentrations in the River Thames basin, UK: Are phosphorus concentrations beginning to
33 limit phytoplankton biomass? *Science of the Total Environment*, Vol. 426, 1, P 45–55
- 34 Castellazzi, M.S., J. Matthews, F. Angevin, G.A. Wood, P.J. Burgess, I. Brown, K.F. Conrad, and
35 P.N. Perry. 2010. Simulation scenarios of spatiotemporal arrangement of crops at the
36 landscape scale. *Environ. Model. Softw.* 25:1881–1889. doi:10.1016/j.envsoft.2010.04.006.
- 37 Comber, S., Blackwood D., Gilmour D.; Georges K.; Cassé F.; Thorell A. Source Control of
38 Phosphorus from Domestic Sources - Options and Impacts (09/WW/17/10) 2009: UK Water
39 Industry Research (UKWIR), 1 Queen Anne's Gate, London, UK. ISBN: 1 84057 526 3.
- 40 Crossman, J., Whitehead, P.G., Futter M.N., Jin, L., Wade, A.J., Shahgedanova, M., Castellazzi, M.
41 2013. The implications of changes in climate, land use and water resource strategies for the
42 effective management of phosphorus in the River Thames, *Science of the Total*
43 *Environment*, in press
- 44 Crossman J, Futter MN, Oni SK, Whitehead PG, Jin L, Butterfield DA, Baulch HM, Dillon PJ.
45 2012. Impacts of climate change on hydrology and water quality: future proofing
46 management strategies in the Lake Simcoe watershed, Canada. *Journal of Great Lakes*
47 *Research* doi:10.1016/j.jglr.2012.11.003.
- 48 Cuttle, S.P., Macleod, C.J.A., Chadwick, D.R., Scholefield, D., Haygarth, P.M., Newell-Price, P.,
49 Harris, D. Shepherd, M.A., Chambers, B.J., Humphrey R., 2007 An Inventory of Measures
50 to Control Diffuse Water Pollution from Agriculture: User Manual., Final Report for
51 DEFRA, London, pp 113
- 52 DEFRA, 2012 Agricultural Census Database, University of Edinburgh. Web Resource:
53 <http://edina.ac.uk/agcensus/description.html>
- 54 DEFRA, 2003. Cost curve assessment of phosphorus mitigation options relevant to UK agriculture.
55 DEFRA project code PE0203, Devon, UK.
56
57
58
59
60

- 1
2 DEFRA, Consultation on options for controls on phosphates in domestic laundry cleaning products
3 in England, February 2008. Department for Environment, Food and Rural Affairs, Nobel
4 House, 17 Smith Square, London SW1P 3JR.
- 5 Elliott, J.A., Jones, I.D., Thackeray, S.J., 2006 Testing the sensitivity of phytoplankton communities
6 to changes in water temperature and nutrient load, in a temperate lake. *Hydrobiologia* **559**,
7 401-411.
- 8 EA, 2012 Environment Agency report: Review of best practice in treatment and reuse/recycling of
9 phosphorus at wastewater treatment works. Report number SCHO0812BUSK-E-E, August
10 2012.
- 11 EU, 2000 Common Implementation Strategy for the Water Framework Directive (2000/60/EC).
12 Guidance Document No. 5. Transitional and Coastal Waters: Typology, Reference
13 Conditions and Classification Systems.
- 14 Fezzi C., Hutchins M., Rigby D., Bateman I.J., Posen P., Hadley D. 2010 Integrated assessment of
15 Water Framework Directive nitrate reduction measures, *Agricultural Economics*, vol. 41,
16 pp. 123-134
- 17 Fezzi, C., Rigby D., Bateman, I.J., Hadley D., Posen P. and Deflandre-Vlandas 2008 Estimating
18 the range of economic impacts on farms of nutrient leaching reduction policies, *Agricultural*
19 *Economics*, Vol 39, Issue 2, 197–205
- 20 Garrick D., De Stefano L., Fung F., Schlager E., Connell D., Pittock J and New N. 2013 Managing
21 Hydroclimatic Risk in Federal Rivers: A Global Assessment Framework, *Water Security*
22 *Risk and Society*, *Philosophical Transactions of the Royal Society A*, ??
- 23 Gober P. 2013 Decision Making Under Uncertainty: A New Paradigm for Water, *Water Security*
24 *Risk and Society*, *Philosophical Transactions of the Royal Society A*, ??
- 25 Grey D., Briscoe J., Blackmore D., Kelman J. and Muller M. 2013 A Global Framework for Water
26 Security: Why it Matters? *Water Security Risk and Society*, *Philosophical Transactions of*
27 *the Royal Society A*, ??
- 28 Hall J. 2013 Risk--based principles for defining and managing water security, *Water Security Risk*
29 *and Society*, *Philosophical Transactions of the Royal Society A*, ??
- 30 Hewitt, C. D. and D. J. Griggs., 2004. Ensembles-based Predictions of Climate Changes and their
31 Impacts. *Eos* 85: 566.
- 32 Hutchins, M., Fezzi, C., Bateman, I., Posen P. and Deflandre-Vlandas A., 2009 Cost-Effective
33 Mitigation of Diffuse Pollution: Setting Criteria for River Basin Management at Multiple
34 Locations, *Environmental Management*, Vol. 44, 256-267
- 35 Hutchins, M.G., M., Johnson, A C, Deflandre-Vlandas, A., Comber, S., Posen, P., and Boorman D.
36 (2010) Which offers more scope to suppress river phytoplankton blooms: Reducing nutrient
37 pollution or riparian shading? *Science of The Total Environment*, Volume 408, Issue 21,
38 5065-5077.
- 39 IPCC (Intergovernmental Panel on Climate Change) 2007 *Climate Change 2007: The Physical*
40 *Science Basis: Summary for Policymakers*. Fourth Assessment Report of the IPCC (ed. by
41 M. L. Parry, O. F. Canziani, J. P. Palutikof, P. J. van der Linden and C. E. Hanson).
42 Cambridge University Press, Cambridge, UK.
- 43 Jin, L., Whitehead, P.G., Futter, M.N. and Lu Z, 2012 , Modelling the impacts of climate change on
44 flow and nitrate in the River Thames: assessing potential adaptation strategies, *Hydrology*
45 *Research*, 43 (6), 902-916
- 46 Marsh, T.J., 2007 The 2004-2006 drought in southern Britain. *Weather* **62**, 191 - 196.
- 47 Marsh, T.J., Sanderson, F.J., 1997 A review of hydrological conditions throughout the period of the
48 LOIS monitoring programme - Considered within the context of the recent UK climatic
49 volatility. *Science of the Total Environment* **194**, 59-69.
- 50 Murphy, J.M., Sexton, D.M.H., Jenkins, G.J., Boorman, P.M., Booth, B.B.B., Brown, C.C., Clark,
51 R.T., Collins, M., Harris, G.R., Kendon, E.J., Betts, R.A., Brown, S.J., Howard, T.P.,
52 Humphrey, K.A., McCarthy, M.P., McDonald, R.E., Stephens, A., Wallace, C., Warren, R.,
53
54
55
56
57
58
59
60

- 1 Wilby, R., Wood, R.A., 2009 UK Climate Projections science report: Climate change
2 projections. *Met Office Hadley Centre, Exeter*.
- 3 Newell-Price, J.P., Harris, D., Taylor, M., Williams, J.R., Anthony, S.G., Duethmann, D., Gooday,
4 R.D., Lord, E.I. and Chambers, B.J., Chadwick, D.R. and Misselbrook, T.H. 2011, An
5 Inventory of Mitigation Methods and Guide to their Effects on Diffuse Water Pollution,
6 Greenhouse Gas Emissions and Ammonia Emissions from Agriculture, Report prepared as
7 part of DEFRA project WQ0106, North Wyke Research and ADAS pp 158
- 8 Prior H. and Johnes P.J. 2002 Regulation of surface water quality in a Cretaceous Chalk catchment,
9 UK: an assessment of the relative importance of instream and wetland processes, *Science of*
10 *The Total Environment*, Vol. 282–283, 159–174
- 11 Sacks J., Welch, W.J., Mitchell, T.J., Wynn, H.P. 1989, Design and analysis of computer
12 experiments. *Statistical Science* **4** 409-435
- 13 Sælthun, N. R. 1996 The 'Nordic' HBV Model. Description and Documentation of the Model
14 Version Developed for the project Climate Change and Energy Production. NVE
15 Publication 7, Norwegian Water Resources and Energy Administration, Oslo.
- 16 Thames Water, 2011, Water Resources Management Plan, Thames Water, Reading, pp 50
- 17 UKTAG, 2008, UK Environmental standards and conditions (phase 1). Final Report
- 18 Vollenweider, R.A. 1968 Scientific Fundamentals of the Eutrophication of Lakes and Flowing
19 Waters, with Particular Reference to Nitrogen and Phosphorus as Factors in Eutrophication.
20 OECD-Paris, DAS/CSI/68. 27: 1-182.
- 21 Wade, A. J., Hornberger, G. M., Whitehead, P. G., Jarvie, H. P., Flynn, N. 2001 On modeling the
22 mechanisms that control in-stream phosphorus, macrophyte, and epiphyte dynamics: An
23 assessment of a new model using general sensitivity analysis. *Water Resources Research*,
24 *37*(11), 2777-2792.
- 25 Wade A.J., Durand P., Beaujouan V., Wessel W.W., Raat K.J., Whitehead P.G., Butterfield D.,
26 Rankinen K, Lepisto A, 2002a A generic nitrogen model of European ecosystems: INCA,
27 new model structure and equations. *Hydrology and Earth System Sciences*, **6**, 559-582.
- 28 Wade, A.J., Whitehead P.G. and Butterfield D., 2002b The integrated catchments model of
29 phosphorus dynamics (INCA-P), a new approach for multiple source assessment in
30 heterogeneous river systems: model structure and equations, *Hydrol. Earth Sys. Sci.* **6** 583-
31 606.
- 32 Wade AJ, Butterfield D, Lawrence DS, Bärlund I, Ekholm P, Lepistö A, Yli-Halla M, Rankinen K,
33 Granlund K, Durand P, et al. 2009. The Integrated Catchment Model of Phosphorus (INCA-
34 P), a new structure to simulate particulate and soluble phosphorus transport in European
35 catchments, Deliverable 185 to the EU Euro-limpacs project, UCL, London, pp 67.
- 36 Whitehead, P.G., 1990 Modelling nitrate from agriculture to public water supplies. *Phil. Trans. R.*
37 *Soc. Lond. B* **329**, 403-410.
- 38 Whitehead, P.G., Wilson, E.J., Butterfield, D., 1998a A semi-distributed Integrated Nitrogen model
39 for multiple source assessment in Catchments (INCA): Part I - model structure and process
40 equations. *Science of the Total Environment* **210**, 547-558.
- 41 Whitehead, P.G., Wilson, E.J., Butterfield, D., Seed, K., 1998b A semi-distributed integrated flow
42 and nitrogen model for multiple source assessment in catchments (INCA): Part II -
43 application to large river basins in south Wales and eastern England. *Science of the Total*
44 *Environment* **210**, 559-583.
- 45 Whitehead, P.G., Johnes, P.J., Butterfield, D., 2002 Steady state and dynamic modelling of nitrogen
46 in the River Kennet: impacts of land use change since the 1930s. *Science of the Total*
47 *Environment* **282**, 417-434.
- 48 Whitehead, P.G., Wilby, R.L., Butterfield, D., Wade, A.J., 2006 Impacts of climate change on in-
49 stream nitrogen in a lowland chalk stream: An appraisal of adaptation strategies. *Science of*
50 *the Total Environment* **365**, 260-273.
- 51 Whitehead, P.G., Wade, A.J., Butterfield, D., 2009b Potential impacts of climate change on water
52 quality and ecology in six UK rivers. *Hydrology Research* **40**, 113-122.
- 53
54
55
56
57
58
59
60

- 1
2 Whitehead PG, Jin L, Baulch HM, Butterfield DA, Oni SK, Dillon PJ, Futter M, Wade AJ, North R,
3 O'Connor EM, Jarvie HP. 2011. Modelling Phosphorus Dynamics in Multi-branch River
4 Systems: A Study of the Black River, Lake Simcoe, Ontario, Canada. *Science of the Total*
5 *Environment* 412-413: 315-323
- 6 Wilby, R., Greenfield, B., Glenny, C., 1994 A Coupled Synoptic Hydrological Model for Climate-
7 Change Impact Assessment. *Journal of Hydrology* **153**, 265-290.
- 8 Wilby, R.L., Whitehead, P.G., Wade, A.J., Butterfield, D., Davis, R.J., Watts, G. 2006 Integrated
9 modelling of climate change impacts on water resources and quality in a lowland catchment:
10 River Kennet, UK. *Journal of Hydrology*. 330: 204 – 220.
- 11 WWF, 2008 Vulnerability Assessment of the River Thames Basin. Report, WWF London.
- 12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

For Review Only